




|                   |   |
|-------------------|---|
| Under Development |   |
| Mass production   | ● |

## Product naming rules 产品命名规则

HL-C 2525 K4 R 3 E A  
1 2 3 4 5 6 7 8

- 1: 鸿利光电代码
- 2: 产品系列代码
- 3: 尺寸代码
- 4: 芯片代码
- 5: 表示发光颜色为红光
- 6: 表示使用700mA分光
- 7: 模具代码
- 8: 基板材质代码



**ATTENTION**  
OBSERVE PRECAUTIONS  
FOR HANDLING  
ELECTROSTATIC  
DISCHARGE  
SENSITIVE  
DEVICES

## Features 特点

- Dimension 尺寸: 2.45mm\*2.45mm\*1.85mm
- Long operating life 寿命长
- High efficiency 高效率
- Lambertian radiation pattern 朗伯光照模式
- Low voltage DC operated 低电压直流工作
- High heat dissipation efficiency 散热效率高
- Cool beam, safe to the touch 冷光源, 触摸安全
- Superior ESD protection 良好的静电防护能力
- RoHS compliant 符合RoHS标准

## Applications 应用

- Warning Light 警示灯
- Decoration Lighting 装饰灯
- Car Light 汽车灯





## Specifications 规范

### (1) Absolute Maximum Ratings at Ta=25°C 在25°C时绝对极限条件

| Parameter 参数                                            | Symbol 符号        | Rating 值                 | Units 单位 |
|---------------------------------------------------------|------------------|--------------------------|----------|
| Input power 输入功率                                        | Pi               | 3                        | W        |
| Forward Current 正向电流                                    | I <sub>f</sub>   | 700                      | mA       |
| Reverse Current 反向电流                                    | I <sub>r</sub>   | 30                       | uA       |
| Electrical thermal resistance junction /solder point 热阻 | Rth              | 12.5                     | °C/W     |
| Junction Temperature 结温                                 | Tj               | 115                      | °C       |
| Electrostatic Discharge (HBM) (静电)                      | ESD              | 2000                     | V        |
| Operating Temperature Range 工作温度                        | Topr             | -35°C To +100°C          |          |
| Storage Temperature Range 储藏温度                          | Tstg             | -40°C To +100°C          |          |
| Lead Soldering Temperature*引线焊接温度                       | T <sub>sol</sub> | Max. 350°C for 3sec Max. |          |

#### Notes 注:

- All high power emitter LED products mounted on aluminum metal-core printed circuit board, can be lighted directly, but we do not recommend lighting the high power products for more than 5 seconds without a appropriate heat dissipation equipment. When using at 700mA, TS (cathode point) temperature should be controlled below 75°C, When using at 350mA, TS (cathode point) temperature should be controlled below 85°C 所有高功率的发光LED产品安装在铝金属为核心印刷电路板,可直接点亮,但我们不建议在没有一个适当的散热设备时,照明高功率LED点亮超过5秒,当产品为700mA使用,TS点(负极焊盘)温度控制在75°C以下;当产品为350mA使用,TS点(负极焊盘)温度控制在85°C以下。
- Wave peak and soak-stannum soldering etc.is not suitable for this products.波峰焊、浸锡焊接不适合这个产品。
- Reflow soldering should not be done more than two times.The reflow temperature we recommend is 260°C.  
回流焊不能超过两次,回流焊最高温度建议260°C。
- 1/10 Duty Cycle,0.1ms Pulse Width.1 / 10占空比, 0.1ms脉冲宽度。

### (2) Typical Optical/ Electrical Characteristics @Ta=25°C 典型的光学/电气特性在 Ta=25°C

| Symbol 符号         | Item 名称                         | Min. 最低 | Typ. 典型 | Max. 最高 | Units 单位 | Test Conditions 测试条件 |
|-------------------|---------------------------------|---------|---------|---------|----------|----------------------|
| ΦV                | Luminous Flux 光通量               | 110     | 140     | —       | lm       | IF=700mA             |
| PPF               | Photosynthetic Photon Flux 光子通量 | 3.2     | 3.5     | 3.8     | μmol/s   | IF=700mA             |
| Φe                | Radiation Power 辐射功率            | 600     | 700     | —       | mW       | IF=700mA             |
| VF                | Forward Voltage [1] 正向电压        | 2.0     | 2.4     | 2.6     | V        | IF=700mA             |
| λ <sub>c</sub>    | Wave Length 主波长                 | 618     | —       | 628     | nm       | IF=700mA             |
| 2θ <sub>1/2</sub> | 50% power angle 发光角度            | 120     | —       | 140     | deg      | IF=700mA             |

#### Note:

- Tolerance of measurement of forward voltage±3%、Wave Length±2nm、luminous flux±5%  
不同标准源测试存在仪器公差:正向电压公差为±3%、主波长公差为±2nm、光通量公差为±5%。
- The test is set to automatic integration, and the integral IP range is 30%~80%.测试设置自动积分,积分IP范围30%~80%。
- Photosynthetic Photo Flux includes wavelengths between 400 to 700 nm  
光合光子通量的测试范围是400-700nm。



## Product bins 产品分级 @IF=700mA Ta=25°C

### (1) Forward Voltage bins 电压分级

| Min VF(V) | Max VF(V) |
|-----------|-----------|
| 2.0       | 2.2       |
| 2.2       | 2.4       |
| 2.4       | 2.6       |

### (2) Brightness bins 亮度分级

| Min $\Phi_v$ (lm) | Max $\Phi_v$ (lm) |
|-------------------|-------------------|
| 110               | 120               |
| 120               | 130               |
| 130               | 140               |
| 140               | 150               |
| 150               | 160               |

### (3) Wavelength bins 波长分级

| Min Wd(nm) | Max Wd(nm) |
|------------|------------|
| 618        | 623        |
| 623        | 628        |





## Typical Optical/Electrical Characteristics Curves 典型光学/电性特征曲线 ( $T_s=85^\circ\text{C}$ Unless Otherwise Noted) ( $T_s=85^\circ\text{C}$ 除非另有注释)

辐射模式 IF=700mA


光谱曲线 IF=700mA

配光曲线 (单位: cd)

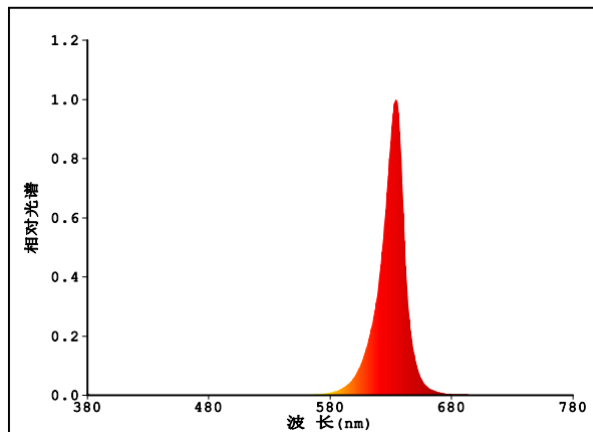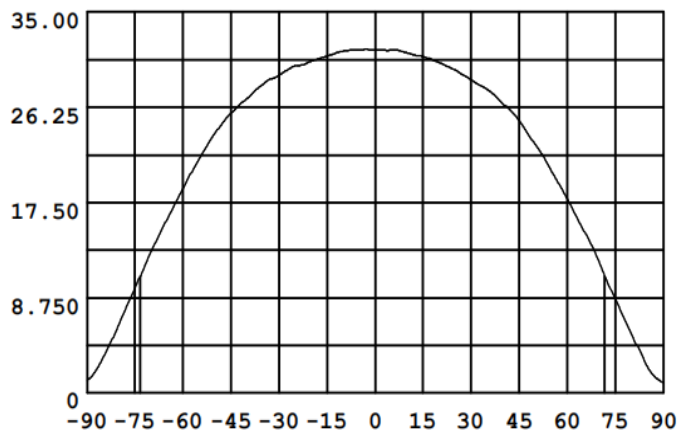


电流-正向电压曲线

IF - VF

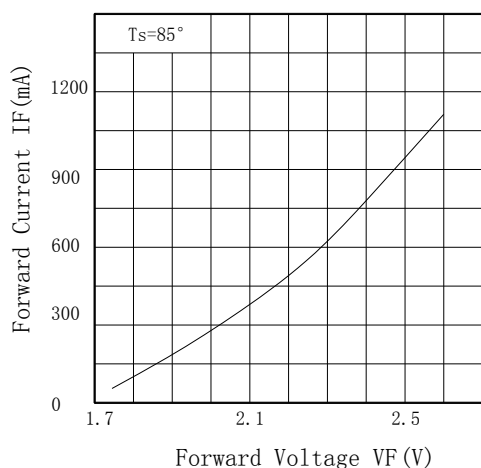


电流-相对光通量曲线

Relative Luminous Flux - IF

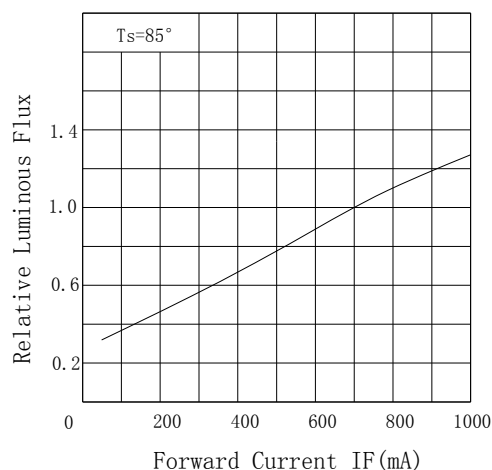

电流-波长漂移曲线

$\Delta \lambda_d$  - IF

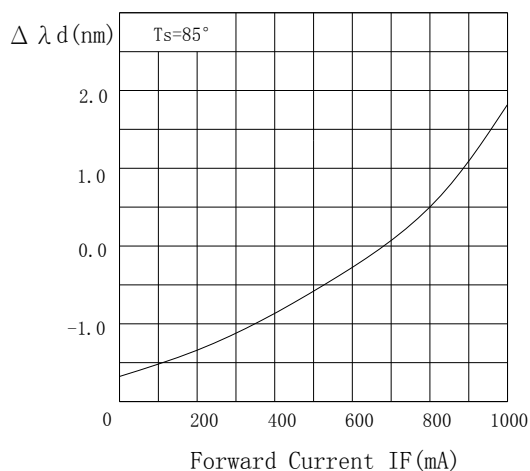




## Typical Optical/Electrical Characteristics Curves 典型光学/电性特征曲线 ( $T_s=85^\circ\text{C}$ Unless Otherwise Noted) ( $T_s=85^\circ\text{C}$ 除非另有注释)


温度-正向电压曲线

$T_s - V_F$

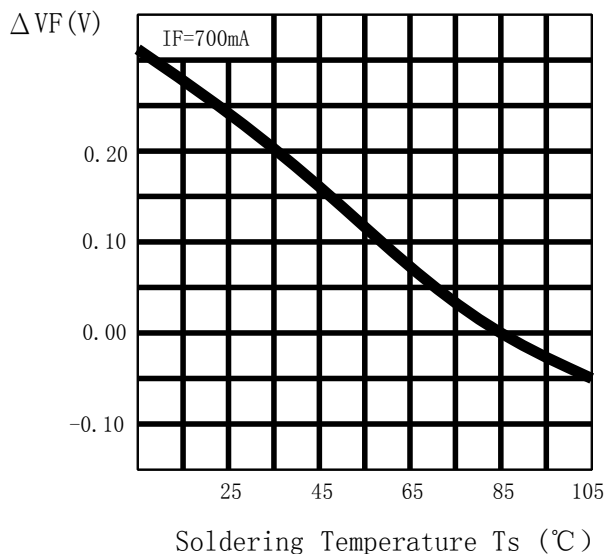


温度-相对光通量曲线

Relative Luminous Flux -  $T_s$

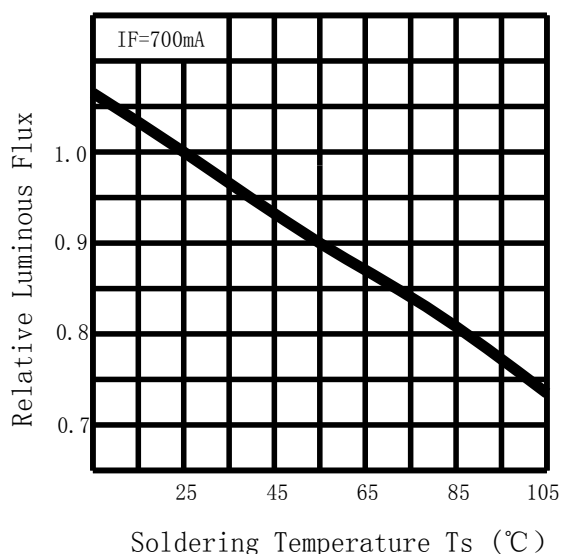


温度-波长漂移曲线

$\Delta \lambda_d - T_s$

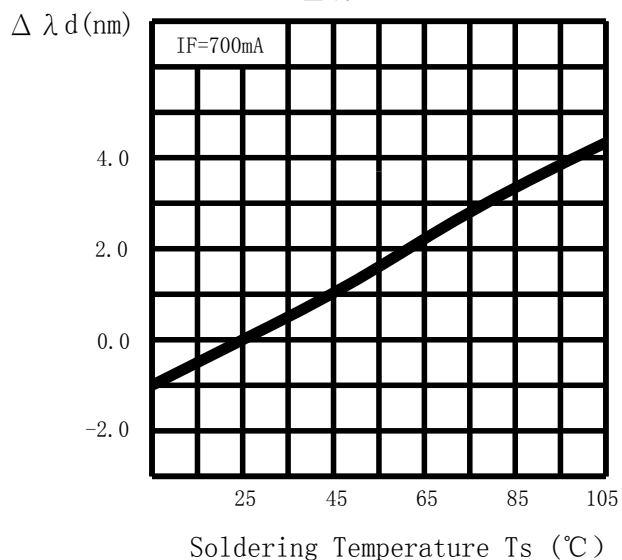


温度-最大允许操作电流

Allowable Forward Current -  $T_s$

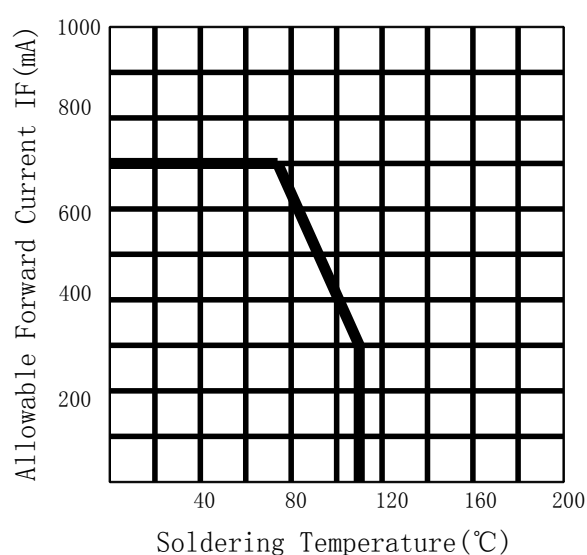




## Package Dimensions 封装尺寸

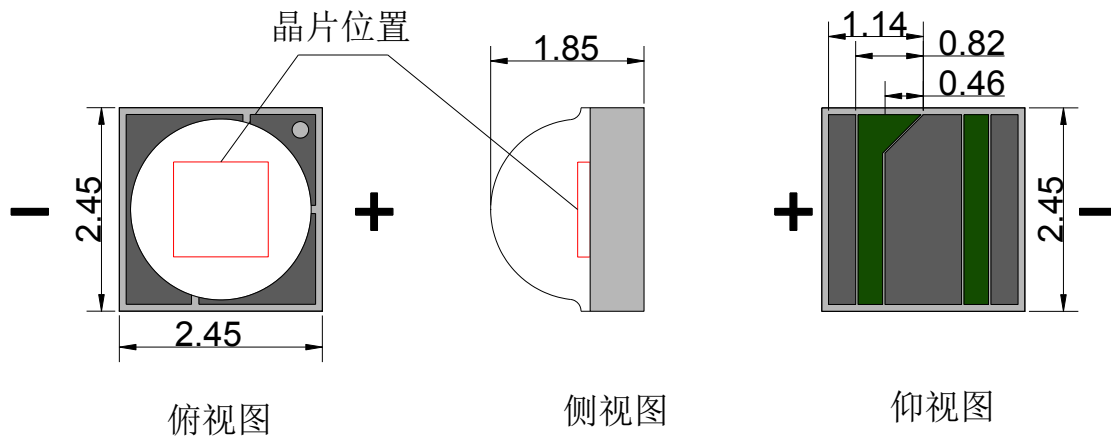

### Notes 注:

1. All dimension units are millimeters.  
所有尺寸单位均为毫米.
2. All dimension tolerance is  $\pm 0.15\text{mm}$  unless otherwise noted.  
所有尺寸误差是 $\pm 0.15$ 毫米除非另有说明

## Welded plate and steel mesh Dimensions 焊盘及钢网尺寸

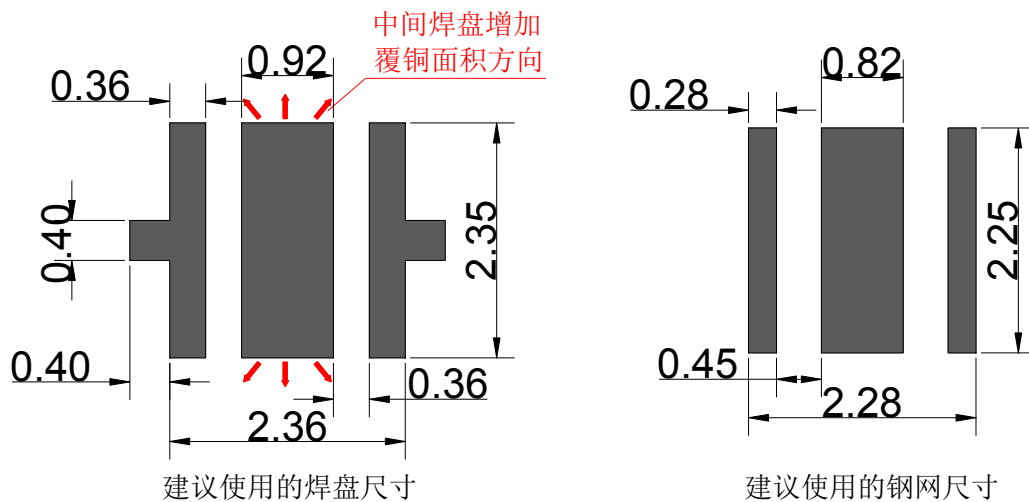

### Notes 注:

When the circuit configuration is not affected, suggested the increase in the middle of the copper area, or the connection between the middle and the pad and the negative electrode can improve the cooling performance of the product.

在不影响电路配置时，建议增加中间焊盘覆铜区域，或中间焊盘和负极焊盘连接，能提高产品散热性能。

## Label 标签

TYPE: XXXXXXXXXX

产品型号

QTY: XXXXX

包装数量

VF: Forward voltage rank

正向电压档次范围

ΦV: Luminous Flux rank

光通量档次范围

IF: XXXX

分选电流

WD: Wave Length

主波长

DATE: XXXX

生产日期

LOT.NO: Lot Number

生产批号


|                                                                                     |                              |                                                                                      |
|-------------------------------------------------------------------------------------|------------------------------|--------------------------------------------------------------------------------------|
|  | <b>HONGLI</b> TRONIC<br>鸿利光电 |  |
| TYPE: XXXXXXXXXXXXX                                                                 |                              | QTY: XXX PCS                                                                         |
| Bin: .                                                                              |                              |                                                                                      |
| ΦV: .                                                                               | WD: .                        | VF: .                                                                                |
| DATE: .                                                                             |                              | LOT. NO: .                                                                           |




|                   |   |
|-------------------|---|
| Under Development |   |
| Mass production   | ● |

## Tape Specifications(Units:mm)包装规格

### (1)Reel package ( 2000 pcs/reel) 卷轴包装 (2000 pcs/卷)

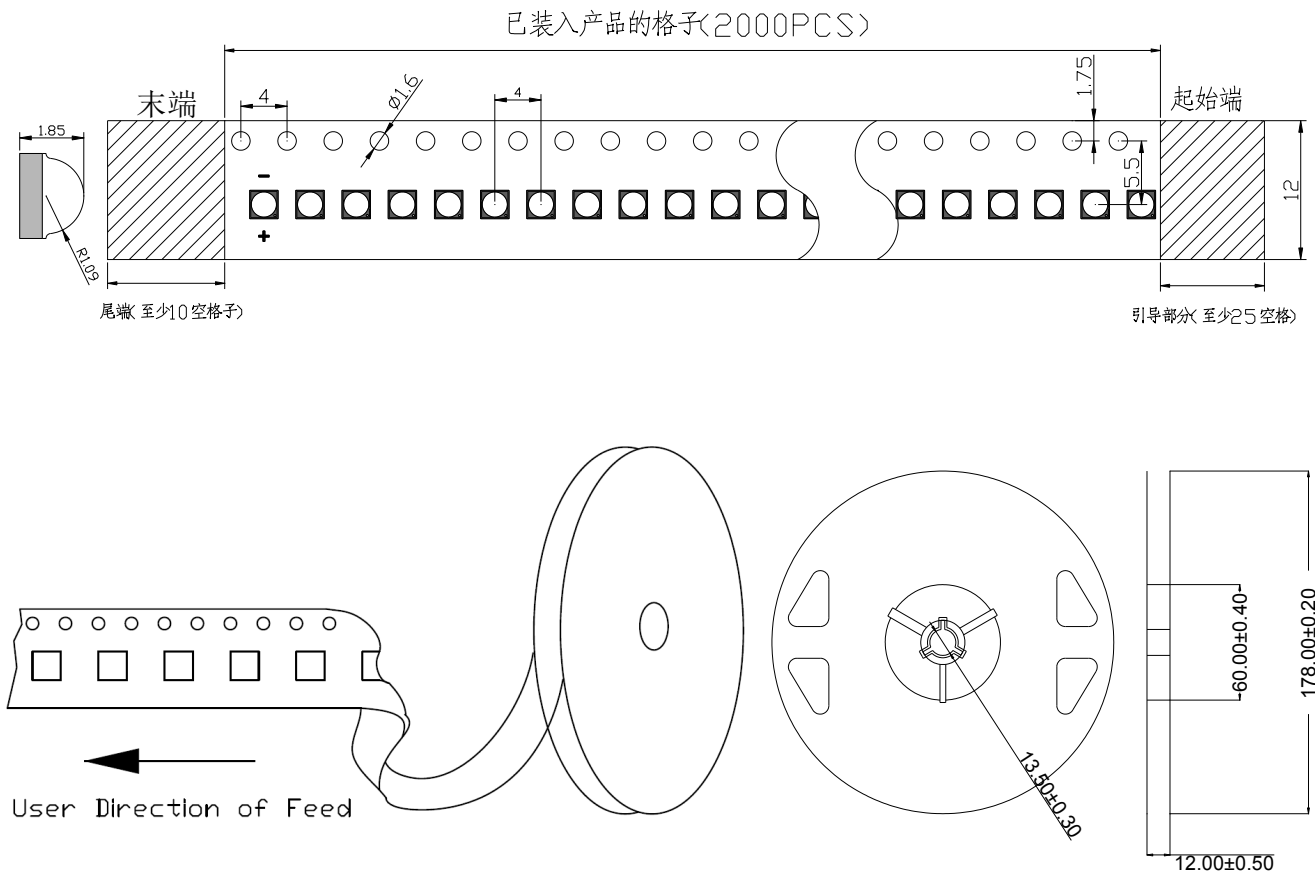


### (2)Moisture resistant packaging 防潮包装

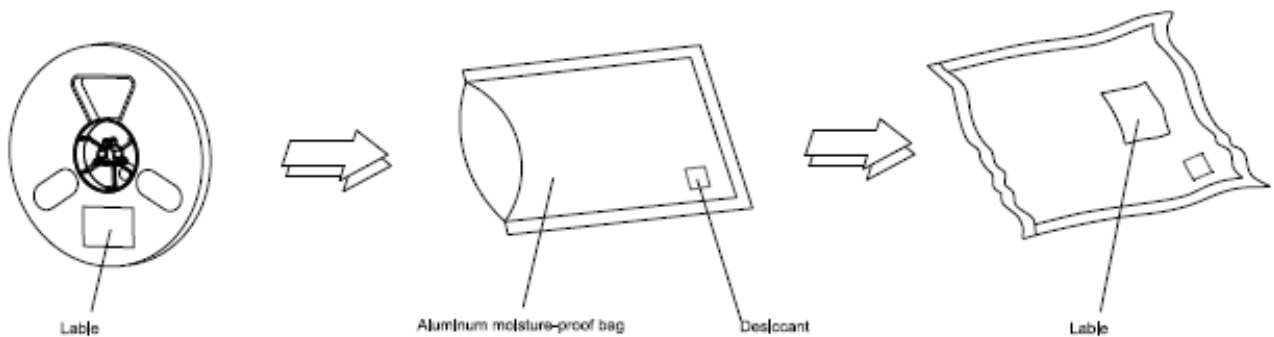





Reflow soldering instructions 回流焊说明

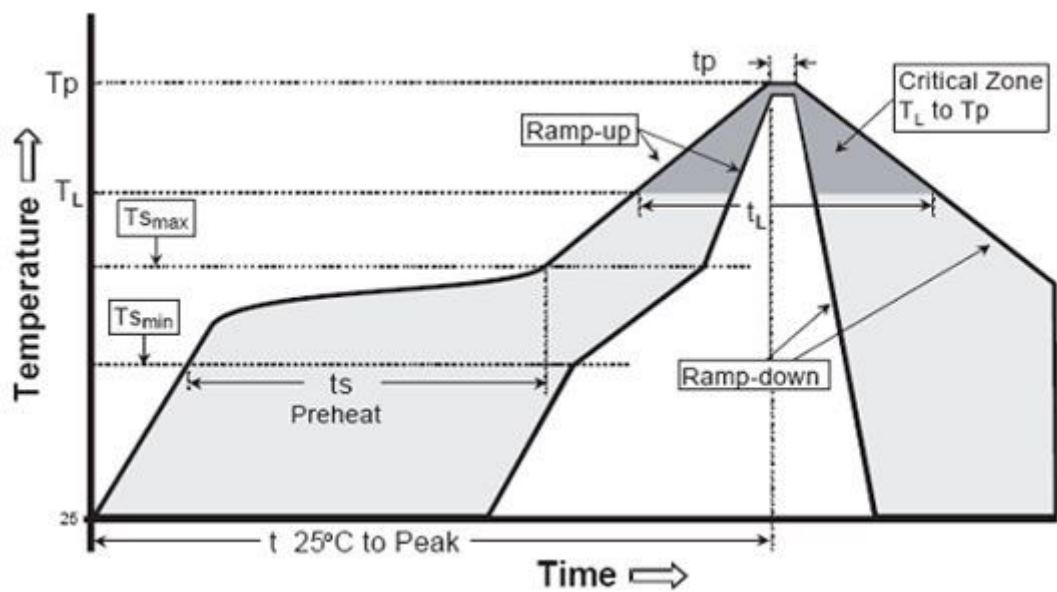

| Profile Feature                                       | Lead-Based solder | Lead-Free Solder |
|-------------------------------------------------------|-------------------|------------------|
| Average Ramp-Rate (Ts <sub>max</sub> to Tp)           | 3°C/second max    | 3°C/second max   |
| Preheat: Temperature Min (Ts <sub>min</sub> )         | 100°C             | 150°C            |
| Preheat:Temperature Max (Ts <sub>max</sub> )          | 150°C             | 200°C            |
| Preheat:Time(ts <sub>min</sub> to ts <sub>max</sub> ) | 60-120 seconds    | 60-180 seconds   |
| Time Maintained Above: Temperature(T <sub>L</sub> )   | 183°C             | 217°C            |
| Time Maintained Above: Time(t <sub>L</sub> )          | 60-150 seconds    | 60-150 seconds   |
| Peak/Classification Temperature(T <sub>p</sub> )      | 215°C             | 260°C            |
| Time Within 5°C of Actual Peak Temperature(tp)        | 10-15 seconds     | 20-40 seconds    |
| Ramp-Down Rate                                        | 6°C/second max    | 6°C/second max   |
| Time 25°C to Peak Temperature                         | 6 minutes max     | 8 minutes max    |

- Note:
- 1.recommend to use a convection type reflow machine with 8 zones.  
建议使用八温区回流焊机。
  - 2.recommend to use Lead-Free Paste with a melting point between 230□-240□.  
建议使用熔点为230□-240□的无铅锡膏。
  - 3.the reflow soldering time should not be more than 400s.  
总的回流焊时间不要超过400s。
  - 4.all temperature means the temperature measured on the surface of the package body.  
所有温度均指在封装本体表面上测得的温度。
  - 5.When using hot plate, the temperature is no more than 220 °C, the time is not more than 60 seconds.  
当使用热板作业时，温度不超过260℃，时间不超过10秒。



## Use the matters needing attention(使用注意事项 )

### 一、储存(storage)：

为避免受潮的影响，我司建议产品在未开包装前储存条件为 5-30℃，相对湿度小于 60%；已开包装的 LED 光源请在 24H 内使用安装完毕，如未用完之产品，请进行除湿并抽真空后密封保存。开封超过一周或湿度卡发生变化时，请务必进行除湿，除湿条件：60℃±5℃，12H；

产品密封保存有效使用期为一年。

To avoid moisture, we recommend storage conditions for the unopened LED +5 ~ +30 °C, relative humidity <60%. LED should be used within 24 Hrs. of opening the package. Please make sure to dehumidify and vacuum pack the remaining/ unused LED. Dehumidifying condition: +60 ° C ± 5 ° C, 12 Hrs. Effective age for the sealed led is one year.

### 二、组装注意事项(the assembly notes)：

焊接条件：此产品必须使用回流焊接的作业方式,回流曲线最高温度不可超过 260℃.作业或存放过程中不可有 1000g 以上的外力或尖锐物体作用于透镜表面（如压力，摩擦等外力以及钳子镊子等工具），以免造成元件损伤；

如果超出此使用条件，鸿利光电将不能保证产品的稳定性，如需使用超出的操作条件，请务必进行风险评。

Soldering Conditions：This product must be used reflow soldering practices, the maximum temperature of reflow should not exceed 260°C. Please make sure when soldering, there is no external force on the soldering surface (such as pressure, friction or sharp metal nails, etc.), to avoid gold wire deformation or damage and other abnormalities.

If beyond recommended conditions, we cannot guarantee the LED stability, please do the risk assessment first.

### 三、防静电措施(anti-Static Measures)：

请采取足够的措施来防止静电产生，比如带静电环或防静电手指套等；每个制造工程关于产品（工厂、设备、机器、载波机和运输单位）应当连接地面，避免产品电气带电。

Please take adequate measures to prevent electrostatic generation, such as wearing electrostatic ring or anti-static fingerstall etc; any relative products like plant equipment, machinery, carrier and transportation units shall be connected to discharging unit/ ground. After assembly, please make sure to discharge Static Electricity with proper ESD equipment.

### 四、温度控制(temperature Control)：

保证散热前提条件为：TS点（负极焊盘）为80摄氏度以下，在此温度以下，散热符合产品寿命要求；为确保在组装时降低接触热阻，请注意在组装过程中，散热片采用良好品质的导热膏涂布均匀且分布面积合理，不可出现太少或高低不平等现象。散热介质需保证电介质耐压测试至少通过500V。



|                   |   |
|-------------------|---|
| Under Development |   |
| Mass production   | ● |

Recommended temperature conditions for enhanced product life: TS (Cathode Point) is  $<80^{\circ}\text{C}$ . During assembly, please ensure that a good quality thermal paste is applied and distributed evenly over the surface. While using thermal pad (Heat Sink), make sure LED is firmly tightened and there is no gap between surfaces. The need to ensure the cooling medium dielectric withstand test at least through 500V.

#### 五、驱动控制(drive control)：

本产品需使用恒流源进行驱动，且输出电流符合规格书上的功率使用范围，如需使用恒压源或其他使用条件，请进行使用效果风险评估。

Drive this product at constant current. Output current range specifications should be according to the operational and other conditions, as mentioned in data sheet. Before using a constant voltage source or altered specifications, other than recommended, please consider risk factors.


#### 六、其他(other)：

本产品不可在以下条件下使用，如果产品在以下条件下使用，评估其使用效果和风险是有必要的：


- 直接或间接的打湿或受潮，比如淋雨等；
- 被海水损害或侵蚀；
- 被暴露于腐蚀性气体(如  $\text{Cl}_2$ ,  $\text{H}_2\text{S}$ 、 $\text{NH}_3$ 、 $\text{SO}_x$ 、 $\text{NO}_x$ 等)；
- 被暴露于粉尘、液体或油；
- 符合使用手册情况下，产品质保期为24个月，有保质协议的则以保质协议为准；
- 产品生命周期后进行回收处理。

Product is not suitable to use in following conditions;

- Direct or indirect wet / damp conditions, such as rain, etc;
- in contact with sea water and erosive materials;
- Exposed to corrosive gases (e.g.,  $\text{Cl}_2$ ,  $\text{H}_2\text{S}$ ,  $\text{NH}_3$ ,  $\text{SO}_x$ ,  $\text{NO}_x$ , etc.);
- Exposed to dust, liquids or oils;
- In accordance with the user manual, the product shelf life is 24 months, If there is a warranty agreement, the warranty agreement shall prevail;
- After the product life cycle for recycling.

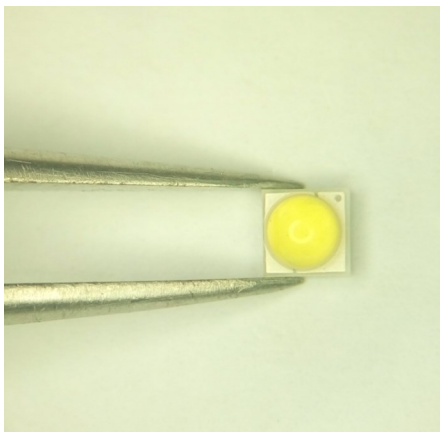

OK

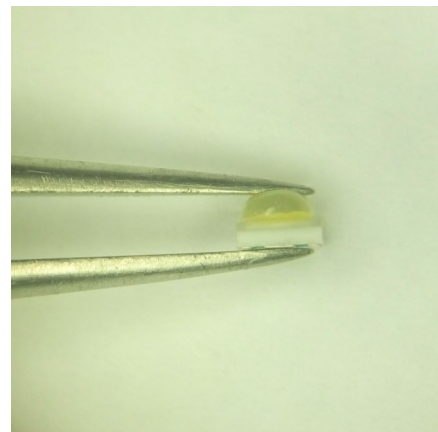

NG



| 修订次数 | 修订人 | 修订内容            | 修订日期         | 版次  |
|------|-----|-----------------|--------------|-----|
| 1    | 梁依雯 | 新建文件            | 2018. 04. 03 | A/0 |
| 2    | 梁依雯 | 修改格式；增加Ts=85℃曲线 | 2020. 01. 02 | A/1 |
| 3    | 苏国强 | 光通量最低值120改为110  | 2021. 6. 5   | A/2 |
| 4    | 李志强 | 更新产品尺寸误差        | 2021. 10. 21 | A/3 |
| 5    |     |                 |              |     |
| 6    |     |                 |              |     |
| 7    |     |                 |              |     |
| 8    |     |                 |              |     |
| 9    |     |                 |              |     |
| 10   |     |                 |              |     |
| 11   |     |                 |              |     |
| 12   |     |                 |              |     |
| 13   |     |                 |              |     |
| 14   |     |                 |              |     |
| 15   |     |                 |              |     |
| 16   |     |                 |              |     |
| 17   |     |                 |              |     |
| 18   |     |                 |              |     |
| 19   |     |                 |              |     |
| 20   |     |                 |              |     |
| 21   |     |                 |              |     |
| 22   |     |                 |              |     |
| 23   |     |                 |              |     |
| 24   |     |                 |              |     |
| 25   |     |                 |              |     |
| 26   |     |                 |              |     |