


## 1.Part code 产品型号命名原则

LH 1611 D101 W - 12 B4 C12 (Ra4)-CS

① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨

- ① Product line code 产品系列代码
- ② Product code base plate 产品基板代码
- ③ Chip code 芯片代码
- ④ Emitting light colors 发光颜色
- ⑤ Recommend Power  
建议使用的功率
- ⑥ The number of parallel Circuit 并联电路数
- ⑦ The number of series Circuit 串联电路数
- ⑧ Ra 显色指数

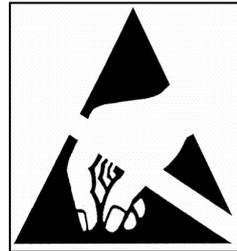

**ATTENTION**注意  
OBSERVE PRECAUTIONS  
FOR HANDLING  
ELECTROSTATIC  
DISCHARGE  
SENSITIVE  
DEVICES

请勿裸手接触器件

## 2.Features 特点

- Dimension 15.85mm×15.85mm×1.6mm 尺寸15.85mm×15.85mm×1.6mm
- Chip Base on Ceramic Board : 铝基板封装
- RoHS compliant (ROHS标准)

## 3.Applications 应用

- Down light 筒灯
- Spot light 射灯




## (2) Electro-Optical Characteristics at Tc=25°C

Color temperature	Voltage	Forward Current		Luminous flux			Thermal resistance
色温K	电压V	电流mA		光通量LM			热阻°C/W
		IF <sub>w</sub>	IF <sub>c</sub>	Min	Typ	Max	0.92
2700K	33-36-39	300	0	875	965	1060	
6000K		0	300	965	1060	1165	

### 6.CIE 1931 X-Y chart

### Chromaticity bins

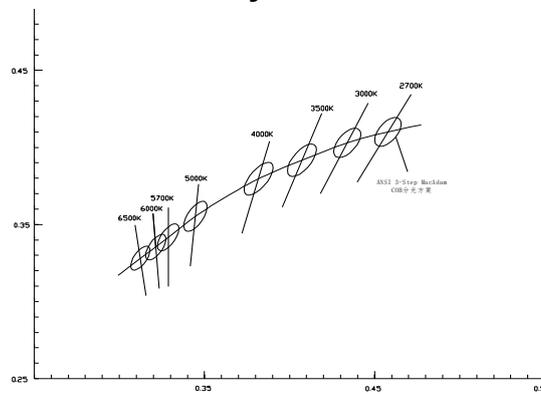

CCT 色温	CIE_x	CIE_y	A	B	Θ
6500K	0.3123	0.3282	0.00669	0.00285	58.57
6000±300K	0.3214	0.3353	0.00708	0.00302	59.21
5700K	0.3287	0.3417	0.007458	0.003198	59.09
5000K	0.3447	0.3553	0.00822	0.00354	59.62
4500K	0.3611	0.3658	0.00881	0.00378	54.35
4000K	0.3818	0.3797	0.00939	0.00402	53.72
3500K	0.4073	0.3917	0.00927	0.00414	54.00
3000K	0.4338	0.4030	0.00834	0.00408	53.22
2700K	0.4578	0.4101	0.0081	0.0042	53.7

Notes for Table

\*1. Color bins are defined at IF=300mA operation. If use different forward current, it will cause the change of chromaticity and forward voltage.

该产品通过瞬态300mA 点亮，分光分色。若使用不同电流，会引起色温及电压的变化

\*2. The tolerance of measurement at our tester is VF+/-3% , Φv+/-10% and Ra+/-2.

测试仪测量的公差在电压±3% , 流明±10% 和显指±2。

3. Tolerance of ±0.005 on x,y coordinates.


色坐标的测量误差允许在±0.005

4. Color region stay within MacAdam "6-step" ellipse from the chromaticity center. The chromaticity center refers to GB/T 10682-2002.




Under Development	●
Mass production	


## 6.Characteristics特性

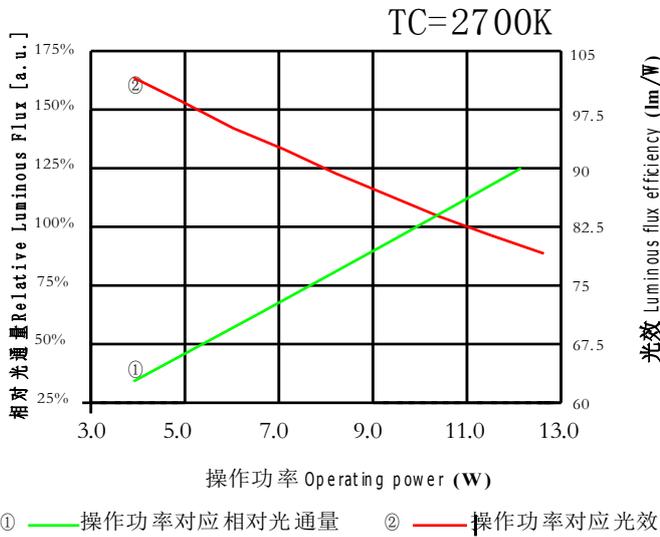


Forward Voltage vs. Forward Current  
正向电压与正向电流曲线图

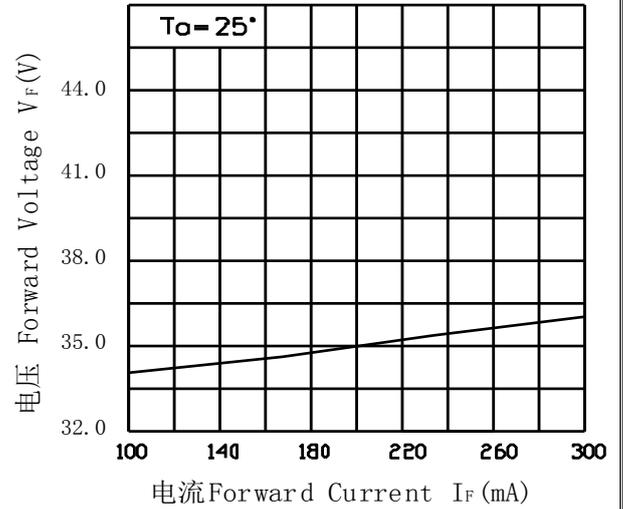


Case Temperature vs. Forward Voltage  
结点温度与正向电压曲线图  $I_F=300\text{mA}$

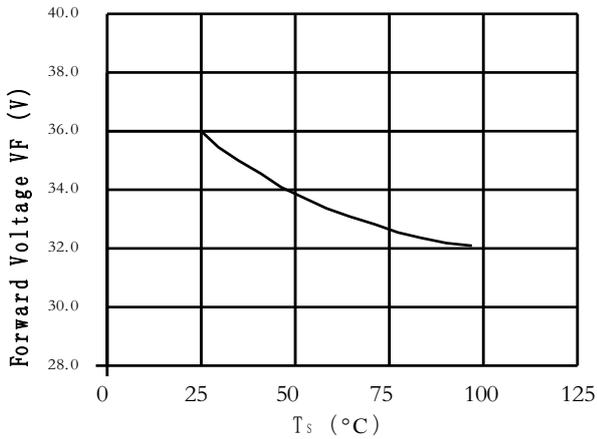

Case Temperature vs. Relative Luminous Flux  
结点温度与相对流明曲线图  $I_F=300\text{mA}$

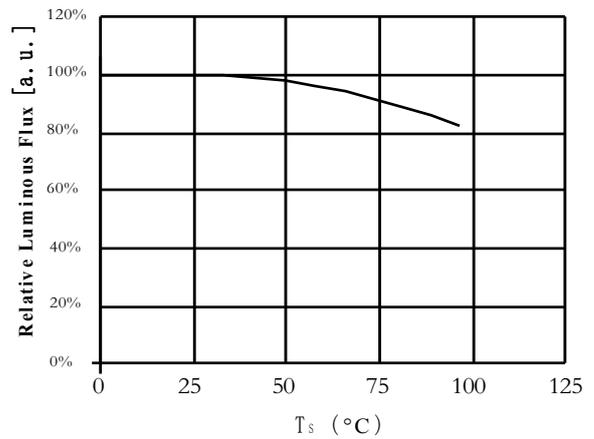





## Spectrum

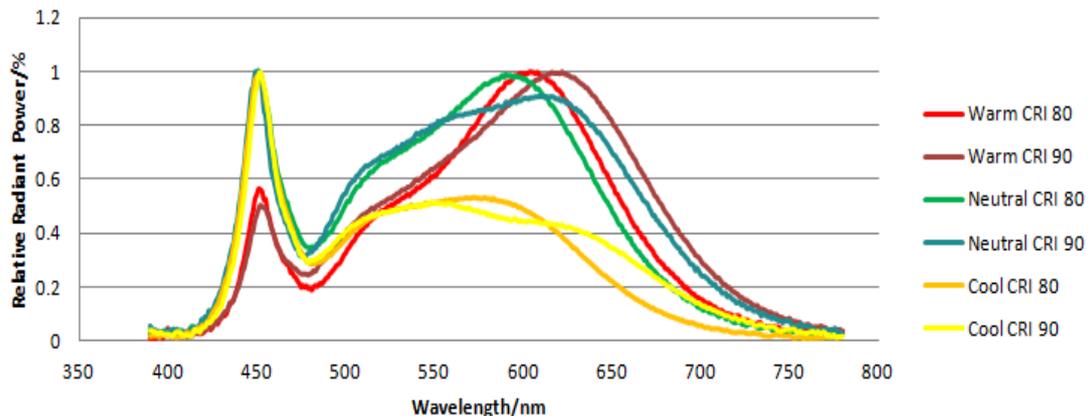




Under Development	●
Mass production	

### 6.Characteristics特性

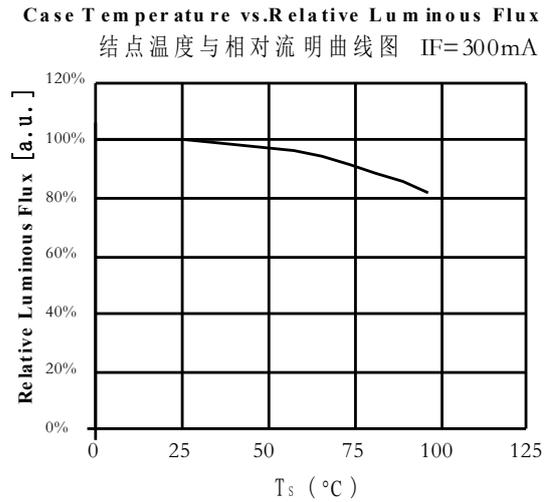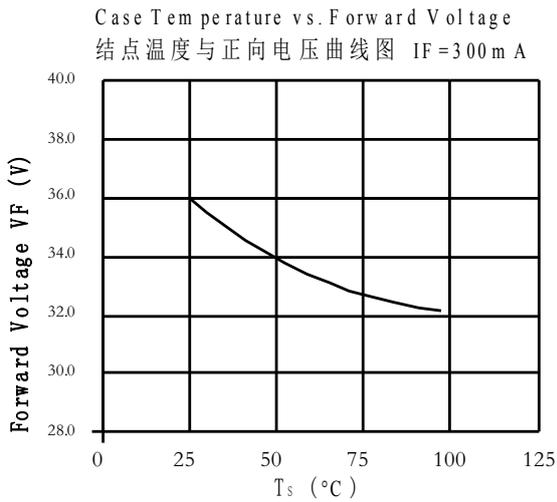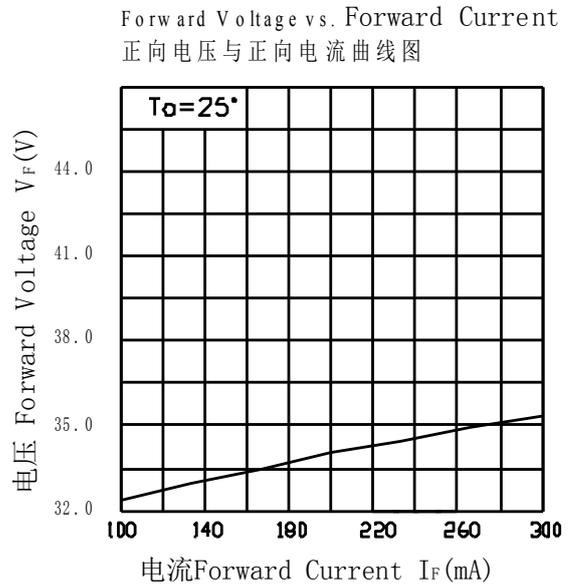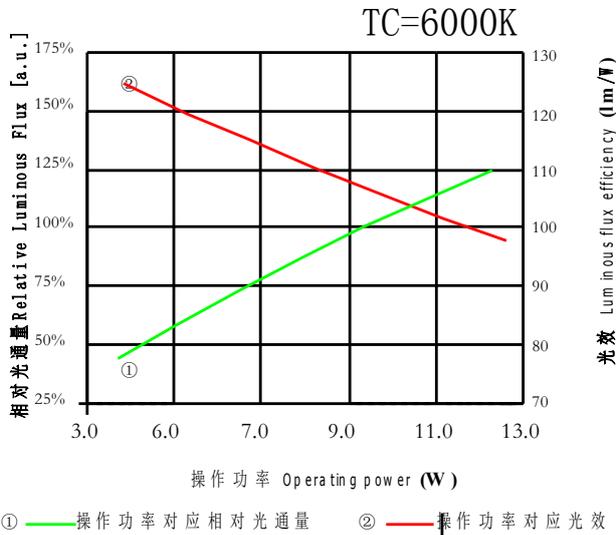

### Spectrum

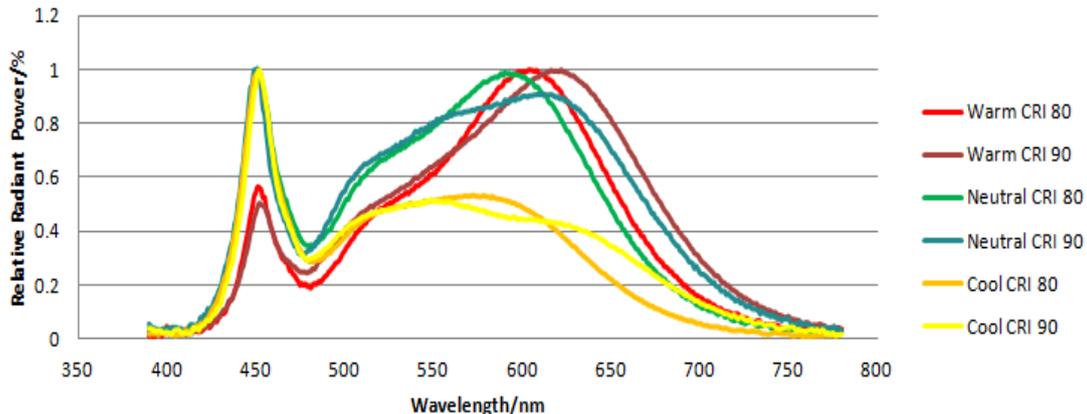



Under Development	●
Mass production	

### 8.Product coding Information 产品喷码信息

D    3060    80    12C    02B    CS    FF  
①    ②    ③    ④    ⑤    ⑥    ⑦

510D-2004009

⑧

背面喷码图



- ① 色温标准 D: 双色产品
- ② 色温            3060=3000K~6000K  
                      2750=2700K~5000K  
                      XXXX=XX00K~ XX00K
- ③ 显色指数    70=Ra1  
                      80=Ra2  
                      90=Ra4  
                      95=Ra5  
                      97=Ra7  
                      型号不带显指用“XX”
- ④ 串数            12=12串  
                      XX=XX串
- ⑤ 并数            05=5并  
                      XX=XX并
- ⑥ 应用范围/客户名称代码 (此项可为空)  
      应用范围:    CS=双色COB  
      如无客户代码此项可不喷码
- ⑦ 芯片代码
- ⑧ 工单代码

## 9.Packing Specifications 包装规格

 <b>HONGLITRONIC</b> 鸿利光电		
TYPE:		QTY:
VF:	IF:	ΦV:
TC:	X/Y:	
SDCM<	Ra>	
DATE:		LOT.NO:

Label on ESD shielding 静电袋上标签

 <b>HONGLITRONIC (Product Identity Card)</b> 鸿利光电		成品标示卡 
品名 (Description):		
产品型号 (Type):		
发光颜色 (Color):		
数量 (QTY):		
生产批号 (LOT NO):		
出货日期 (Date):		
操作员 (Operator):		

Label on box 外箱标签


ΦV: Luminous Flux rank 光通量档次范围

VF: Forward voltage rank 正向电压档次范围



TC: Color temperature 色温

SDCM: 相对色容差


### ■ Packing figure 包装图



Tray: 70pcs

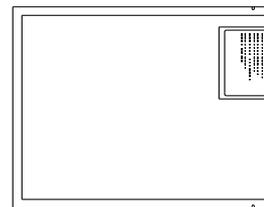

6Tray/ESD Shilding Bag:420pcs

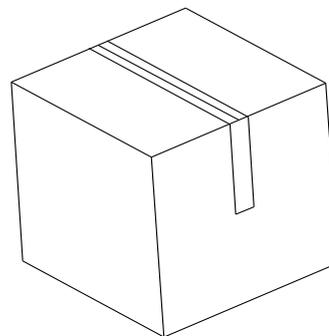

10 ESD Shilding Bag/Outer Box:3360pcs  
L\*W\*H=400\*285\*373mm

## 10. Precaution for use (防护措施)

### 1. Storage 储存

To avoid moisture, we recommend storage conditions for the unopened LED +5 ~ +30 °C, relative humidity <60%. LED should be used within 168 Hrs. of opening the package. Please make sure to dehumidify and vacuum pack the remaining/ unused LED. Dehumidifying condition: +120 ° C ± 5 ° C, 04 Hrs. Effective age for the sealed led is one year.

为避免受潮的影响，我司建议产品在未开包装前储存条件为 5-30° C，相对湿度小于 60%。已开包装的 LED 光源请在 168H 内使用安装完毕，如未用完之产品，请进行除湿并抽真空后密封保存。除湿条件：120° C ±5° C，4H。产品密封保存有效使用期为一年。

### 2. The soldering precautions 组装注意事项：

Soldering conditions: Reflow soldering is not recommended for this LED. If hand soldering, set soldering iron temperature at 350°C and soldering time not More than 5 seconds , Contacts number of soldering bit should be within twice for each terminal, after the first soldering, make sure the substrate surface temperature returns to ambient temperature before a second soldering. Please make sure when soldering, there is no external force on the soldering surface and silicon batardeau (such as pressure, friction or sharp metal nails, etc.), to avoid gold wire deformation or damage and other abnormalities. If beyond recommended conditions, we cannot guarantee the LED stability, please do the risk assessment first.

During assembly, please ensure that a good quality thermal paste is applied and distributed evenly over the surface. While using thermal pad (Heat Sink), make sure LED is firmly tightened and there is no gap between surfaces. In such heat-media products, through a pressure test of at least 500 volts.

焊接条件：此产品不推荐使用回流焊接的作业方式，手工焊接烙铁温度设定 350°C，焊接时间不可超过 5 秒，当手工焊接时，烙铁的温度必须小于 350°C，时间不能超过 5 秒，焊接次数控制在两次以内，第一焊点焊接后请确保基板表面温度恢复到环境温度，方可进行第二次的焊接。焊接时请注意不可有外力作用于胶体表面及外圈的围堰胶上（如压力，摩擦或锋利金属钉等），以免造成金线变形或断线等异常；如果超出此使用条件，鸿利智汇将不能保证产品的稳定性，如需使用超出的操作条件，请务必进行风险评。

为确保在组装时降低接触热阻，请注意导热膏涂布均匀且分布面积合理，不可出现导热膏太少或涂抹高低不平等现象。如使用导热胶垫时，请确保螺丝安装后基板与导热胶垫的完全接触，不可存在中空现象。产品在此类耐热介质下，能通过至少 500 伏的耐压测试。



OK




NG

### 3. Anti-Static Measures 防静电措施：

Please take adequate measures to prevent electrostatic generation, such as wearing electrostatic ring or anti-static fingerstall etc; any relative products like plant equipment, machinery, carrier and transportation units shall be connected to discharging unit/ ground. The ESD sensitivity of this product is > 1000V(HBM), after assembly the final lamp, please make sure to discharge Static Electricity by proper ESD equipment.

请采取足够的措施来防止静电产生，比如带静电环或防静电手指套等；每个制造厂关于产品（工厂、设备、机器、载波机和运输单位）应当连接到底面，请避免产品电气带电；本产品的防静电敏感度超过1000V（HBM），装配后的最终灯具产品（S）建议检查是否损坏LED（漏电现象）。

### 4. Temperature Control 温度控制：

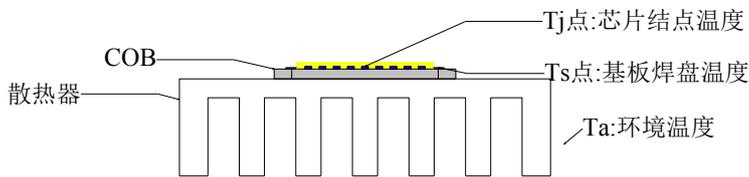

$$T_j = T_s + R_{j-s} * P_i$$

其中  $T_j$  = 芯片结点温度， $T_s$  = 基板测试焊盘温度， $P_i$  = 输入功率

$T_j$  : Chip junction temperature， $T_s$  : pad temperature， $P_i$  : power

Recommended temperature conditions for enhanced product life: the  $T_s$  point (negative pads) should not exceed the absolute maximum rating in LED illumination system, COB recommendation colloid surface temperature control  $\leq 160^\circ\text{C}$ .

保证散热前提条件为：请务必将  $T_s$  点（负极焊盘）控制在对应系统最高范围内，建议 COB 胶体表面温度控制  $\leq 160^\circ\text{C}$ 。

### 5. The drive control 驱动控制：

Drive this product at constant current. Output current range specifications should be according to the operational and other conditions, as mentioned in data sheet. Before using a constant voltage source or altered specifications other than recommended, please consider risk factors.

本产品需使用恒流源进行驱动，且输出电流符合规格书上的功率使用范围，如需使用恒压源或其他使用条件，请进行使用效果风险评估。

The Peak Current: The LED chip will be burned easily if the LED is shocked by the current which is higher than the rated current in a short time. Please make sure that the current of the LED is less than the maximum current when the power is on.

电流尖峰：LED 受到一个短暂大于额定电流的冲击，容易造成芯片烧毁现象。请务必保证电源开启瞬间电流小于光源使用最大电流。

## 6. a minimum current value 最小电流值点亮

A minimum current value of lighting of Per die is 1mA.

When a minimum current is applied, LED dice may look different in their brightness due to the individual difference of the LED element.

COB产品每颗芯片单颗电流1mA进行点亮检测，LED芯片的亮度可能会有所不同。

## 7.Other其他：

Product is not suitable to use in following conditions

本产品不可在以下条件下使用，如果产品在以下条件下使用，评估其使用效果和风险是有必要的：

Direct or indirect wet / damp conditions, such as rain, etc.;

直接或间接的打湿或受潮，比如淋雨等；

In contact with sea water and erosive materials

被海水损害或侵蚀；

Exposed to corrosive gases (e.g., Cl<sub>2</sub>, H<sub>2</sub>S, NH<sub>3</sub>, SO<sub>x</sub>, NO<sub>x</sub>, etc.);

被暴露于腐蚀性气体(如 Cl<sub>2</sub>, H<sub>2</sub>S、NH<sub>3</sub>、SO<sub>x</sub>、NO<sub>x</sub>等)；

Exposed to dust, liquids or oils;


被暴露于粉尘、液体或油；

Other points for attention, please refer to our LED user manual, In accordance with the user manual, the product shelf life is 24 months, If there is a warranty agreement, the warranty agreement shall prevail.


其它注意事项请参照我们的LED使用手册，符合使用手册的情况下，产品质保期为24个月，有保质协议的则以保质协议为准。

After the product life cycle for recycling.

产品生命周期后进行回收处理。



**OK**



**NG**



修订次数	修订人	修订内容	修订日期	版次
1	欧显雯	新建规格书	2024.10.06	A/0
2	欧显雯	添加特性曲线图	2024. 10. 15	A/0
3				
4				
5				
6				
7				
8				
9				
10				
11				
12				
13				
14				
15				
16				
17				
18				
19				
20				
21				
22				
23				
24				
25				
26				